PRODUCT DATA SHEET

725RSL

SFIC: Enclosure Lock for NEMA Metal Traffic Control Boxes



725RSL-VH
drawer vertical

SPECIFICATIONS

Retrofits: Best 5L7RD (with option code "SL" square latch, spring loaded)
Function: Square latch, spring loaded
Mounting: Rim (surface) mounted
Handing: Available for doors or drawers (VH, RH, or LH)
Cylinder Housing: Solid brass
Barrel Diameter: 1-1/8"
Cylinder Length: 1-1/16"
Finish: US26D (satin chrome) or US4 (satin brass)

Keying Information

Cores: Not included
Accepts: Best, Arrow, Falcon, KSP, Schlage SFIC, or equivalent small format interchangeable cores
Compatible Electronic Cylinders: Medeco Nexgen XT or VIDEX CyberLock SFIC cylinders

Included Accessories

725-1 spacer to fit 6 or 7 cores
725-SP-RL solid lipped strike
725-PA plastic thumbturn

Available Finishes



US26D



US4

Alternate Handings



725RSL-LH



725RSL-RH




As installed on inside of metal cabinet door.

Included Accessories



725-PA



725-SP-RL




725-1

Handing Chart



BEST compatible interchangeable core cylinders

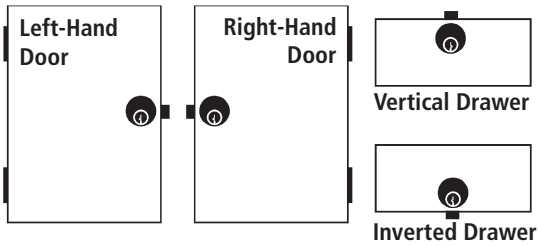

WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

206-362-3290 | 800-525-0954
www.olympuslock.com
© 2025 Olympus Lock, Inc.

OLYMPUS® LOCK INC

725RSL

SFIC: Enclosure Lock for NEMA Metal Traffic Control Boxes

PRODUCT DATA SHEET

Optional Accessories

See our website for a complete list of optional components.

206/207 Series

- 206 Series 6-pin SFIC cylinder
- 207 Series 7-pin SFIC cylinder




BEST compatible interchangeable core cylinders

Available Keyways

A	B	C	D	E	F	G	H	
J	K	L	M	Q	1C	1D	KMT300	


207 Series (BL/GR/RD)


- 207 Series 7-pin A keyway SFIC cylinders available in BLUE, GREEN or RED.

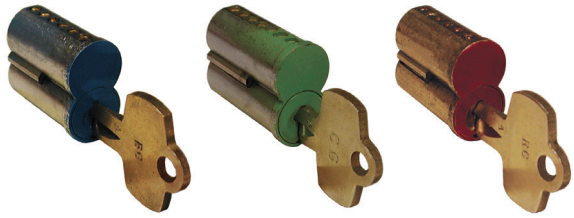

Dimensions


Dimensions are the same for all handings.

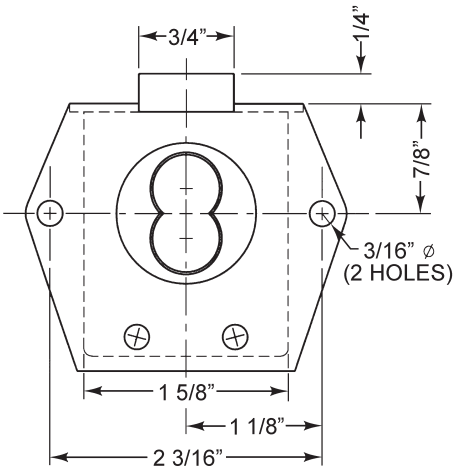


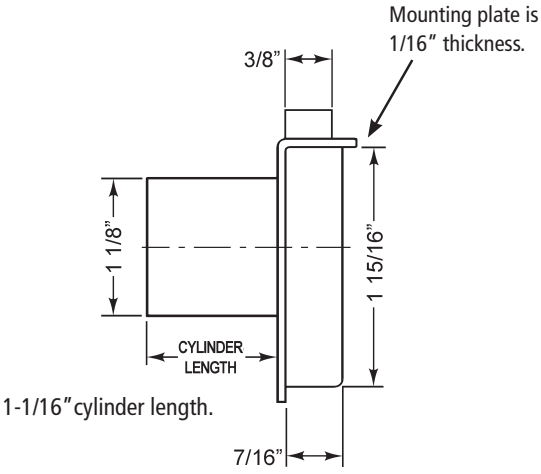


1-1/16" cylinder length.

Typical Installation

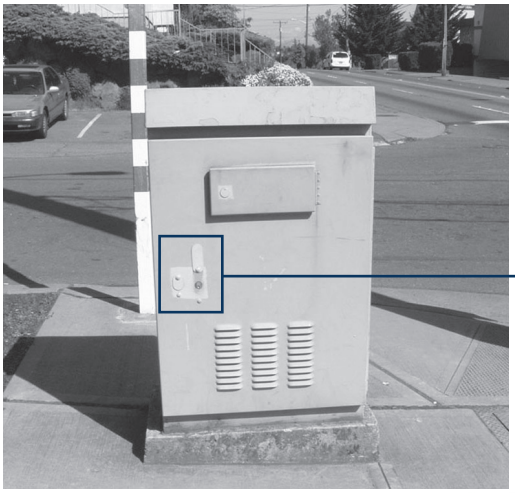

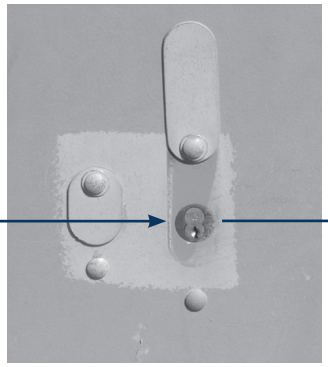

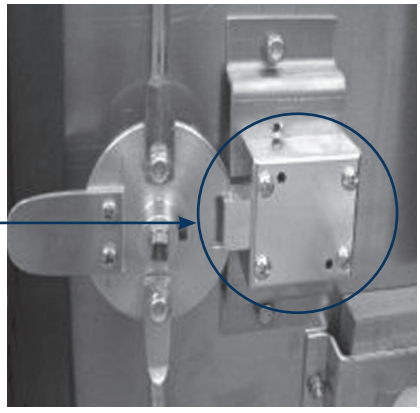

As installed on inside of metal cabinet door.